


Control Panel Contactors

PROJECT	
LOCATION	

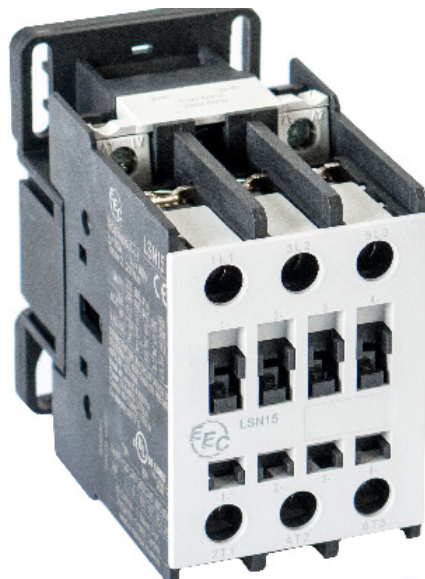


Description

- 4-Pole or 8-Pole Normally Open or 4-Pole Normally Closed Electrically Held contactor for use in LCM Contactor Control Panels
- 30A max current
- 120VAC or 277VAC coil


Specifications

- Electrical Rating: 30A @ 600VAC
- Coil Voltage: 120VAC or 277VAC
- Operating Temperature: -25 °C to +55 °C
- Storage Temperature: -55 °C to +80 °C
- Mechanical Lifespan: 10 million cycles
- Mounting: Screw or 35mm DIN Rail
- Standards: UL

Dimensions - 4-Pole Contactor (mm)

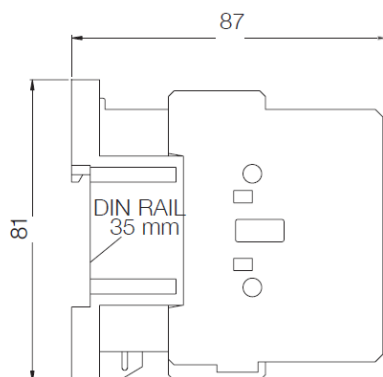

Dimensions - 8-Pole Contactor (mm)

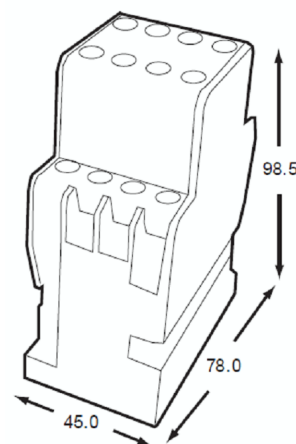

Ordering Guide

Part Number	# of Poles	Pole Type	Max Load	Load Wire	Coil Voltage
OP41	4	Normally Open	30A	14-10 AWG	120VAC
OP42	4	Normally Open	30A	14-10 AWG	277VAC
OP81	8	Normally Open	30A	14-10 AWG	120VAC
CP41	4	Normally Closed	30A	14-10 AWG	120VAC
CP42	4	Normally Closed	30A	14-10 AWG	277VAC

